



# 过渡接头 ADAPTER

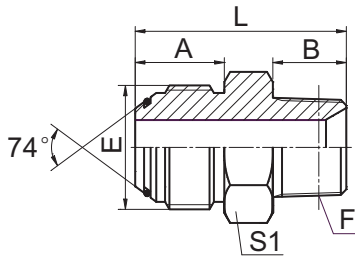

**1JT-OR/SP**

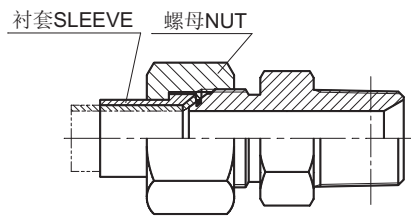

**1JT-OR/SP/RN**

JIC 外螺纹 74° 外锥带 O 形圈 / 英锥管外螺纹  
 JIC MALE 74° CONE WITH O-RING/BSPT MALE

代号 PART NO.	螺纹 THREAD		O 形圈 O-RING		尺寸 DIMENSIONS				
	E	F	E 端		A	B	L	S1	
1JT-10-12OR/SP	7/8"X14	R3/4"X14	13X1		19.3	20	48.5	30	
1JT-12OR/SP	1.1/16"X12	R3/4"X14	17X1		21.9	20	51	30	
1JT-14-12OR/SP	1.3/16"X12	R3/4"X14	19X1.5		22.6	20	52.5	32	
1JT-16OR/SP	1.5/16"X12	R1"X11	22X1.5		23.1	25.5	59	36	
1JT-16-12OR/SP	1.5/16"X12	R3/4"X14	22X1.5		23.1	20	53	36	
1JT-16-20OR/SP	1.5/16"X12	R1.1/4"X11	22X1.5		23.1	26.5	61.5	46	
1JT-20OR/SP	1.5/8"X12	R1.1/4"X11	28X1.5		24.3	26.5	63	46	
1JT-20-16OR/SP	1.5/8"X12	R1"X11	28X1.5		24.3	25.5	62.5	46	
1JT-20-24OR/SP	1.5/8"X12	R1.1/2"X11	28X1.5		24.3	26.5	66.5	50	
1JT-24OR/SP	1.7/8"X12	R1.1/2"X11	35X1.5		27.5	26.5	69.5	50	
1JT-24-20OR/SP	1.7/8"X12	R1.1/4"X11	35X1.5		27.5	26.5	67.5	50	
1JT-32OR/SP	2.1/2"X12	R2"X11	48X2		33.9	30	80	65	
1JT-32-24OR/SP	2.1/2"X12	R1.1/2"X11	48X2		33.9	26.5	77.5	65	

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.